PAGE: 1 of 4

DESIGN

Bridge designs are based on live load, 85 PSF, dead load, 12 PSF, deflection limitation L/300 for live load. Concen trated loads as requested, please specify.

MANUFACTURE

All glued laminated timbers shall be manufactured in conformance with the requirements of the American I nstitute of Timber Construction Standards and Standard Specifications for Glued Laminated Timber, AITC-117.

LUMBER

Southern Yellow Pine shall be kiln-dried and shall be in conformance with standard specificati on for structural glued laminated timber, AITC117. Lumber combination shall be determined by the design requirements for each component and designated on the fabricator's shop drawings.

CONNECTION HARDWARE

The manufacturer shall furnish connection steel and hardware for joining glued laminated timber members to each other and to their supports exclusive of anchorage, embedded in masonry or concrete setting pla tes and items field-welded to structural steel metal. Steel connections are primed and painted with a 2 part epoxy/pol yurethane paint, (galvanizing alternative).

APPEARANCE GRADE

Appearance grade of glued laminated members shall be AITC Architectural.


PRESERVATIVE TREATMENT

All glued laminated members shown on the drawing as requiring preservative treat ment shall be 0.3 pcf retention level per AITC 109 "Standard for Preservative Treatment of Structural Glued Laminated Ti mber" and in accordance with AWPA C-28 of the American Wood Preservative Association.

QUALITY CONTROL

Structural glued laminated timbers shall be in conformance with American Na tional Standard ANSI/AITC 190.1, latest edition and American Institute of Timber Construction Inspections Manual AITC-200.

Bridge will arrive fully assembled on flat-bed truck ready to have crane life off and set in place, unless otherwise noted on your plans.

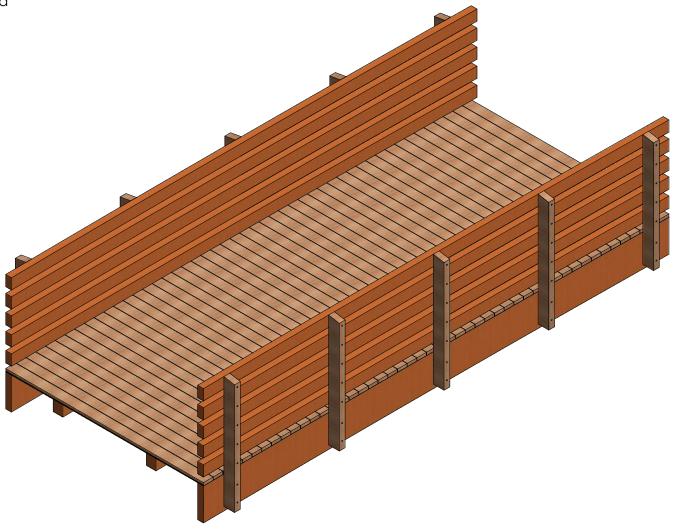




P.O. BOX 145 WEST OLIVE, MI 49460


PRELIMINARY LAYOUT


DESCRIPTION: JES DESIGN #: REV: MODEL #: BRD-STND 8x20 Pedestrian Bridge BRD820 2/13/2019

NOT	FOR	CONSTRUCT	[ON



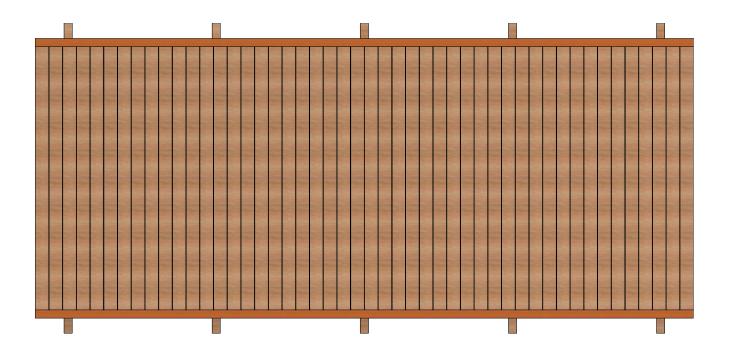

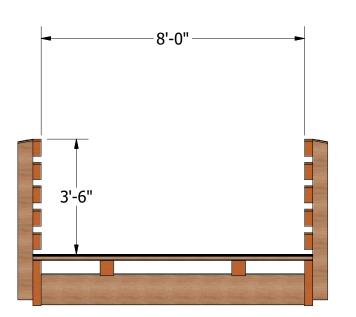


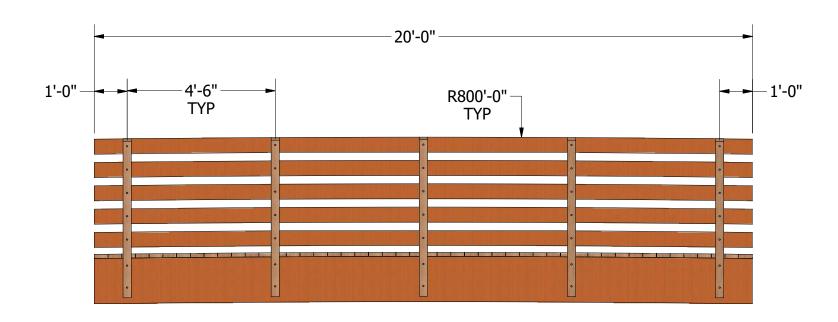



PRELIMINARY LAYOUT NOT FOR CONSTRUCTION

DESCRIPTION:	MODEL #:	DATE:	JES DESIGN #:	REV:
8x20 Pedestrian Bridge	BRD820	2/13/2019	BRD-STND	0

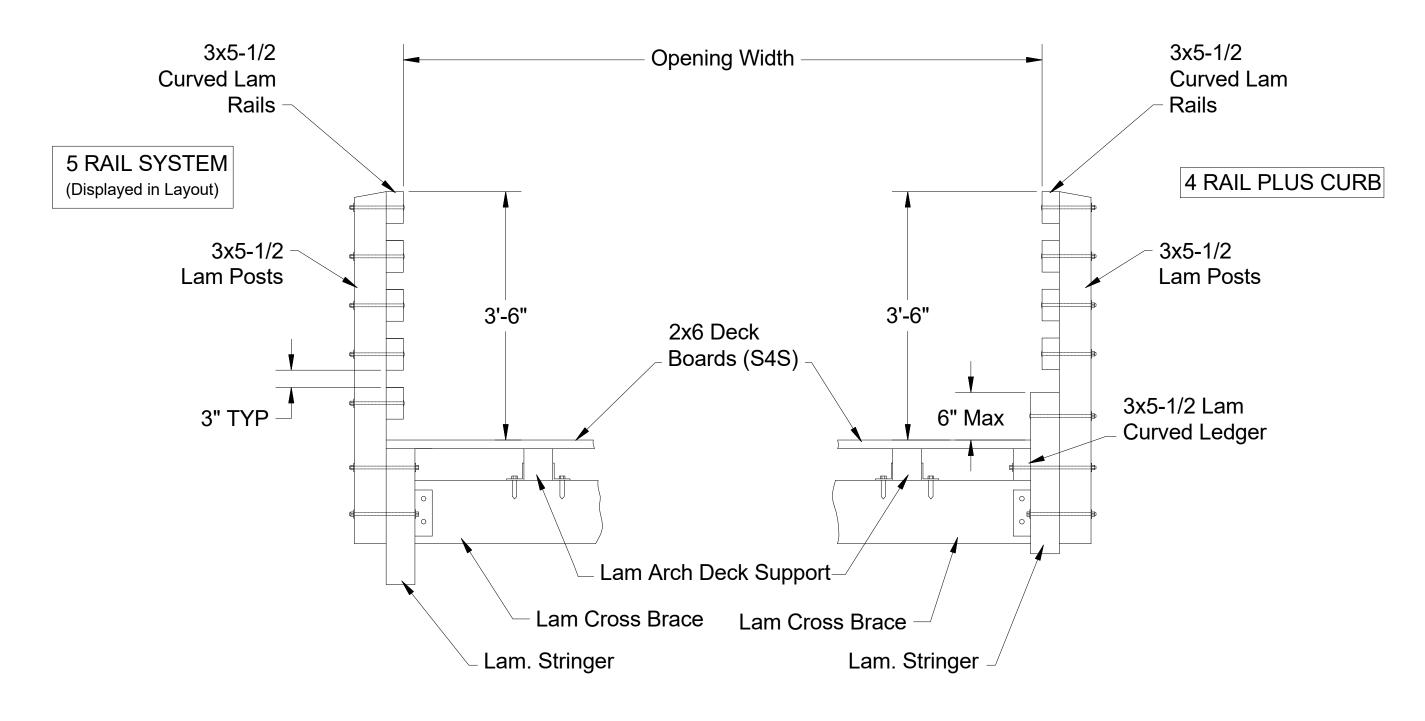

BRIDGE SECTION VIEW



PRELIMINARY LAYOUT

NOT FOR CONSTRUCTION

DESCRIPTION:	MODEL #:	DATE:	JES DESIGN #:	REV:
8x20 Pedestrian Bridge	BRD820	2/13/2019	BRD-STND	0

